




德国亚地斯

# ARDEX

Fast Track Building Products

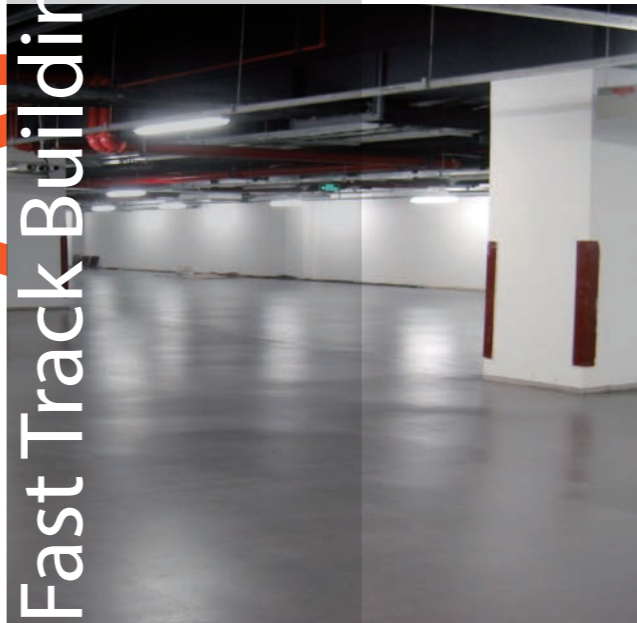

亚地斯建材(上海)有限公司 ARDEX (SHANGHAI) CO., LTD.

上海市徐汇区桂平路481号桂中园2号楼4楼  
4F, Bld 2, Guizhong Park, No. 481,  
Guiping Rd, Xuhui, Shanghai, PRC  
电话/TEL: 021-64161800  
邮件地址: info@ardexchina.com  
网址: www.ardexchina.com



德国亚地斯



printed in 0118

## 亚地斯 快速翻新系统产品



## Company Introduction 公司介绍

In 1949, as a global multinational company, ARDEX was founded in Witten, Germany. For over 60 years, ARDEX has been the technology leader for the entire mortar industry, providing quality and reliable chemical building material.

Established in 2002, ARDEX (Shanghai) Co., Ltd. is a leading chemical building material manufacturer in China, its product range includes tile adhesives, waterproofing, flooring, creative surface design system, etc. ARDEX is committed to develop China market and has set up offices and branches in Shanghai, Beijing, Guangzhou and Chengdu. Meanwhile the factory which located in Pinghu, Zhejiang is also the center for R&D and training in North Asia.

1949年，亚地斯（ARDEX）成立于德国维滕市，是一家全球性的跨国公司。60多年来，亚地斯一直专注于干粉砂浆行业，是整个行业中的技术领导者，提供优质且可靠的化学建材。

亚地斯于2002年进入中国市场，为国内先进的化学建材生产商，其产品包括：地坪系统、瓷砖粘结系统、防水系统、创意饰面系统等，中国总部位于上海，在北京、广州、成都分别设有办事处，坐落于浙江平湖的生产基地，同时也是北亚区的研发和培训学院中心。

## ARDEX Group 亚地斯全球

ARDEX Group has 47 group companies in the world, covering more than 50 countries.  
亚地斯集团在全球拥有47家集团公司，遍及各大洲的50多个国家。



## Innovation DNA 创新特质

It's always ARDEX tradition to breakthrough and innovation

- ARDEX is the inventor of Cement-based Self-leveling.
- Innovative products contribute over 25% of annual sales.
- In 2005, awarded Top 100 Innovative Company in Germany.

突破、创新是亚地斯一贯的传承

- ARDEX是世界上最早发明水泥基自流平的企业；
- 创新产品每年占总销售额的25%以上；
- 2005年，荣获德国100大创新企业。

## Core Technology 核心科技

Local research and technology combined with global knowledge

- 1953, invented self-leveling cement, which created a new era of flooring material.
- 1975, invented "ARDURAPID", unique in the world.
- 2006, invented MICROTEC, unique in the world.
- 2015, ULTRA-SHIELD was introduced in China.

本地研发技术结合全球科技

- 1953年，发明了水泥自流平，开创了建筑地面材料的新纪元；
- 1975年，发明“早强快干”技术，全球首创；
- 2006年，发明“超微科技”，全球首创；
- 2015年，ARDEX“ULTRA-SHIELD博盾防护”技术首登中国。


## Integrity Technology 技术全面

To be one of the world's leading solution providers of high-performance specialty building materials

- Whole system solutions.
- Faster, better and more environmental friendly.
- Lots of top references around the world.

做世界领先的高品质特殊建筑领域的方案提供者

- 从基层到饰面，完整的产品体系；
- 从新建到维修，更快更好更环保；
- 从国内到国际，众多的顶级案例。



Awarded Top100 Innovative Company in Germany  
德国“100大创新企业”



5 hrs


### Wall and Floor Tiling Installation 5小时：墙地面粘结系统



- Tile & Stone Surfaces: 石材或瓷砖饰面:
  - Hotel 酒店 • Residential area 住宅区 • Commercial area 商用区 • Others 其他

7 hrs

### Floor Preparation prior to Floorcovering Installation 7小时：面材铺设前的基层准备

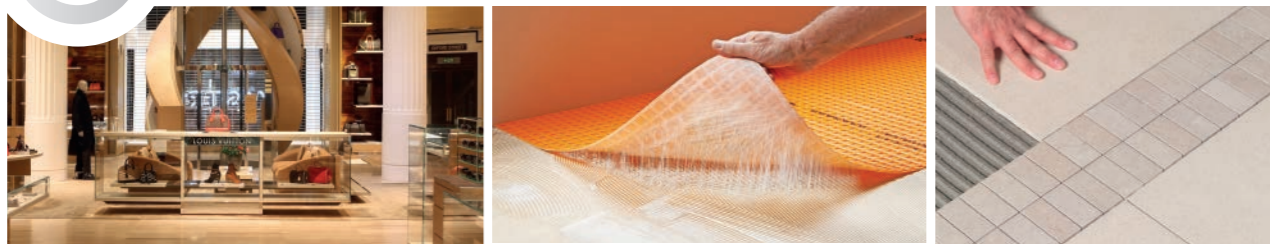

- Floor coverings e.g. hospitals, airports, school, office, etc.  
适用于商用地材的场所: 医院、机场、学校、办公室等。

7 hrs

### Car Park Floor Installation 7小时：停车场地坪系统



- Floors: 地坪:
  - Resin Based 树脂类地坪 • Cement Based 水泥基地坪

### Fast Track Waterproofing Products 快速防潮防水产品



- Internal & external wall and floor 室内外墙地面

## ARDEX System Approach 亚地斯系统方案

ARDEX offers a complete system approach for fast track new property builds and refurbishment projects. The system includes rapid drying floor screeds and moisture control systems, that facilitate the early laying of floorcoverings, as well as specialist plasters and tiling products that ensure the perfect finish is created in the shortest of time frames.


ARDEX products perform in the toughest environments. Ideal for real site conditions, they can significantly shorten the installation period, making them cost effective alternatives to traditional materials.

ARDEX also provides the professional waterproof and moisture control system, not only the decoration waterproof, but Construction Waterproof Repair as well.

亚地斯为新建项目和翻新项目提供了一套完整的快速安装系统。该系统包括快干早强地面砂浆和博盾防护防潮防水系统，减少干燥等待时间，使地面材料能更早地铺设；特种腻子 and 瓷砖粘结剂确保了在最短的时间完成饰面铺装。

亚地斯产品在最恶劣的环境下依然可应用。在不同作业环境下，它们大大缩短了安装时间，并节约成本。


亚地斯也提供专业的防水和潮气控制系统，这不仅包括装饰防水，同时还包括建筑结构防水修复。

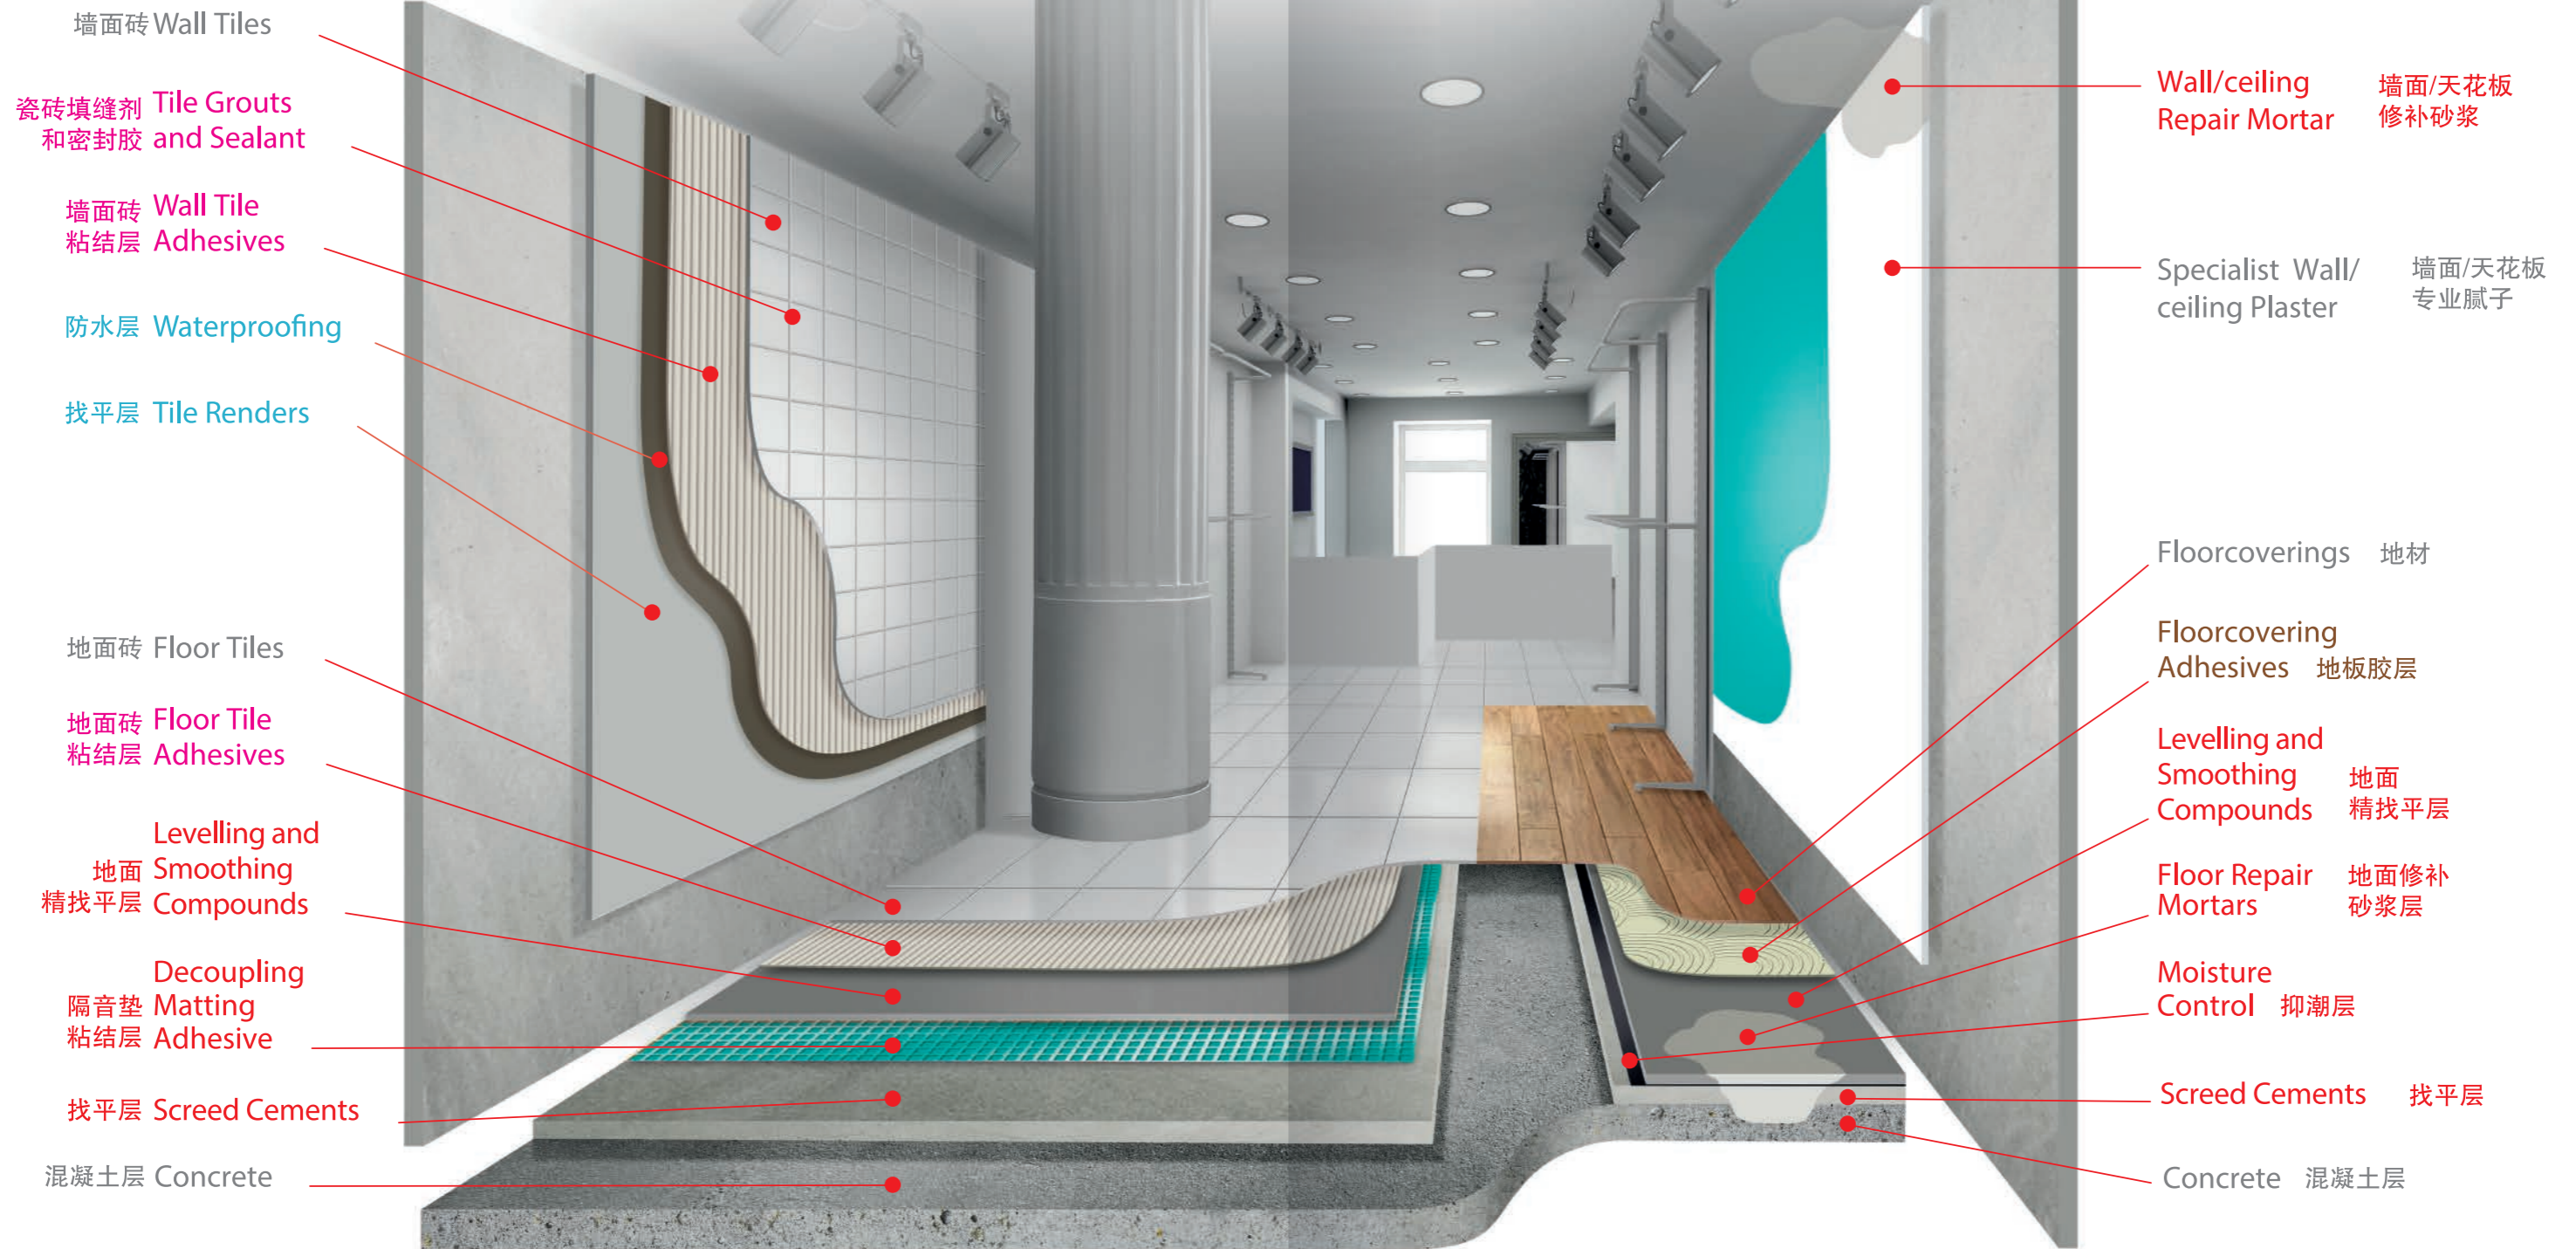



## Renovation solutions 翻新系统方案

**5 hrs** 5hours: Wall and Floor Tiling Installation  
5小时: 墙地面粘结系统

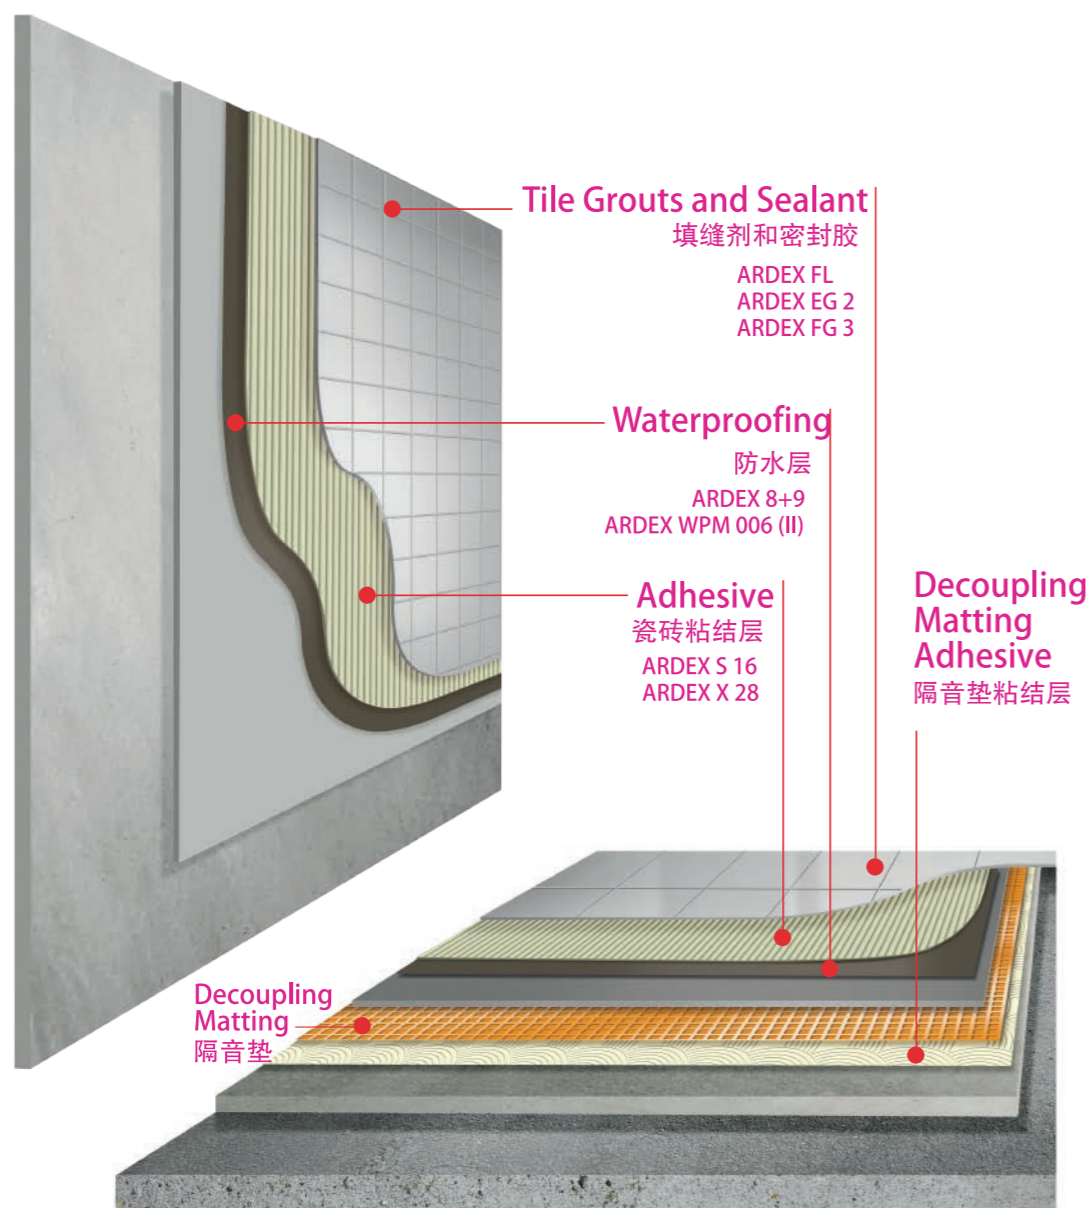


## Introduction to Wall and Floor Tiling Installations 墙地面粘贴系统介绍



ARDEX S 16



ARDEX EG 2




ARDEX 8+9



ARDEX Decoupling Matting Adhesive  
亚地斯隔音垫粘结剂

ARDEX has a wide range of tiling products ideal for completing full tiling installations in the shortest time possible, under real site conditions. The ARDEX range of fast track products enable quicker drying times meaning that they are suitable for re-opening areas to receive foot traffic in the shortest time possible so that subsequent work can commence without delay. In this section we will cover our range of fast track products for: · Waterproofing · Decoupling Matting Adhesive · Wall and Floor Tiling · Grouting and Sealing

亚地斯拥有广泛的瓷砖 / 石材粘结剂和系统, 在各种作业环境下可用最短时间完成铺装。亚地斯快干早强产品拥有极短的干燥时间, 特别适用于人流量较大的公共区域的快速翻新, 不会延误后续作业。在这个部分, 我们的快干早强产品主要包括: · 防水 · 隔音垫粘结剂 · 墙地面粘结剂 · 填缝剂和密封胶



Waterproofing  
防水

1.5 hrs  
小时



Tile Adhesive  
瓷砖粘结剂

2 hrs  
小时



Grout  
填缝剂

1.5 hrs  
小时

完工  
Open  
for  
Traffic



## Product Introduction 产品介绍



**ARDEX 8+9**  
Rapidry Waterproofing Membrane  
快干型超弹防水涂料



### Areas of Application 应用区域

Idea for commercial and residential bathrooms, showers and kitchens prior to the installation of tile or stone  
商业和住宅建筑内的卫生间、淋浴间、厨房等铺贴瓷砖或石材前的防水处理

**Fast Track Bene<sup>xt</sup>**  
快干优势

Tile in 90 mins,  
flood test in 4 hours  
90分钟贴砖,  
4小时浸水测试

**Application**  
施工厚度

2 coats  
2涂

**Crack isolation**  
裂缝桥接

Up to 3mm  
最宽可达3mm

When installation kitchens, showers and wet rooms, it is essential to ensure that moisture sensitive backgrounds are protected from water ingress. ARDEX 8+9 guarantees a waterproof finish that can be tiled on in just 90 minutes



安装厨房，淋浴间及潮湿房间时，确保湿气敏感的石材背面免受水的侵蚀是非常必要的。ARDEX 8+9保证在完成防水施工90分钟后即可后续施工。



**ARDEX S 16**  
Rapid Hardening and Drying  
Tile and Natural Stone Adhesive  
超级快干型瓷砖胶粘剂



### Areas of Application 应用区域

Suitable for natural stones, porcelain and fully vitrified tiles, internal walls and floors  
适用于天然石材，陶瓷和玻化砖，室内墙地面

**Fast Track Bene<sup>xt</sup>**  
快干优势


Walk on & Grout in 2-3 hours  
2-3小时后  
即可开放步行和填缝

**Water Staining reduce**  
避免湿斑

Yes  
是

**Efflorescence reduce**  
避免泛碱

Yes  
是

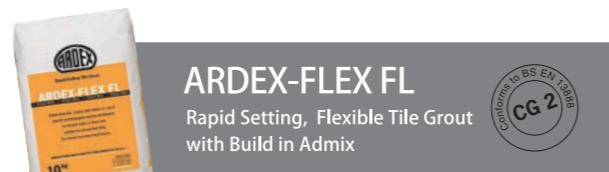

**ARDEX-FLEX FL**  
Rapid Setting, Flexible Tile Grout  
with Build in Admix



### Areas of Application 应用区域

Idea for commercial and domestic environments, e.g. swimming pools, showers, and kitchens  
商业和家居环境下的泳池，淋浴间和厨房等区域

**Fast Track Bene<sup>xt</sup>**  
快干优势

Walk on in 90 mins  
30 color available  
90分钟可开放步行；  
30种颜色

**Suitable for Floor Heating**  
适用于地暖

Yes  
是

ARDEX Tile Grouts and silicones offer the perfect finish and their rapid dry properties mean that areas can be reopened and receive foot traffic in as little as 90 minutes. The ARDEX Grout range of tile grouts is available in 30 colors

亚地斯瓷砖填缝剂和硅胶呈现完美的饰面，拥有快干的特性，意味着在短短的90分钟内，施工区域即可开放使用。亚地斯填缝剂有30种颜色可供选择。



### ARDEX EG 2 - Epoxy grout 环氧填缝剂

Ideal for use in swimming pools and other wet areas. For joint widths 1.5-10mm. Internal and external areas, walls and floors.  
Water based, low VOC, APEO free  
适用于长期潮湿区域及游泳池；可用于缝宽1.5-10mm的室内外墙地面瓷砖填缝剂；水性材料、低VOC、不含APEO



### ARDEX FG 3 - Wide joint tile grout 宽缝填缝剂

Available in ARDEX standard colors. For tile joints from 4mm to 12mm in width.  
Easy to apply and clean off. For use on floors and walls. For internal and external applications  
多种颜色可供选择；适用于室内外墙地面4-12mm填缝宽度；施工便捷，清洁容易



### ARDEX WPM 006 - Waterproofing membrane 柔性防水浆料

Flexible—Accommodates normal building movement.  
Easy to apply - Seamless, simply apply by roller or brush.  
Breathable— Permits the escape of moisture vapors from the substrate.  
High Bonding strength – Excellent adhesion to most substrates

柔性佳—可满足建筑物正常位移；施工便捷——可用刷子或滚筒施工，整体无缝；防水透汽——可释基层内的水汽；  
粘结强度高——对绝于大多数基层均有良好的粘结能力



### ARDEX DS 40 - Impact Sound Reduction and Decoupling System 隔音垫

Decoupling and sound reduction system for the installation of tiles, slabs, natural stone and concrete pavers  
The decoupling function minimizes tension between the substrate and the part to be installed  
The sound reduction function reduces remarkably the transmission of impact and air-borne sound  
-impact sound reduction 14 dB

地面瓷砖石材、混凝土道砖等铺贴时作应力隔离和减少撞击声传导的系统；应力隔离功能：吸收基层和面材间的应力；隔音功能：显著地减少撞击声的传导，降低音量可达14dB



### ARDEX X 28 - Rapid Hardening and Setting Tile Adhesive 超级快凝型瓷砖胶粘剂

· Rapid Setting · Fast hardening · Super flexibility · Excellent adhesive strength

· 快凝 · 早强 · 超强柔性 · 粘结强度高



## Case Study 工程案例

### Piccadilly Circus Underground Station, United Kingdom 英国皮卡迪利广场地铁站



It's been over 30 years since ARDEX products were used on the refurbishment of Piccadilly Circus Underground station and although there have been thousands of commuters passing through each day, the work has stood the test of time. Due to the tight time constraints of working on a live site, and with only four hours available after the station had closed each evening, it was important that the project was completed to the highest of standards whilst ensuring that it was ready and safe for public use the next day.

早在30多年前，亚地斯的产品用在了英国伦敦皮卡迪利广场地铁站的翻新项目上，30多年来亚地斯的产品经受了时间的考验。为保证地铁站的正常运营，翻新项目时间紧迫只能在车站夜晚关闭的4个小时里施工，施工商需确保施工期间地铁站白天仍可供公众安全使用。亚地斯提供的全套翻新系统以其独特的高品质性能脱颖而出。

#### Product 产品

- Substrate Preparation      • 基层处理: ARDEX A 35 快干早强水泥
- Tile Adhesive                 • 瓷砖粘结剂: ARDEX S 16 超级快干型瓷砖胶粘剂
- Tile Grout                      • 瓷砖填缝剂

### Burj Al Arab Hotel 阿拉伯塔酒店



#### Product 产品

- Substrate Preparation      • 基层处理
- Tile Adhesive                 • 瓷砖粘结剂
- Tile Grout                      • 瓷砖填缝剂
- Self Leveling                 • 自流平
- Waterproofing               • 防水

### HK SOGO 香港崇光百货




### Nanjing Metro Station 南京地铁站



## Renovation solutions 翻新系统方案

**7 hrs** 7 hours Floor Preparation prior to Floorcovering Installation  
7小时：地材铺设前的基层准备

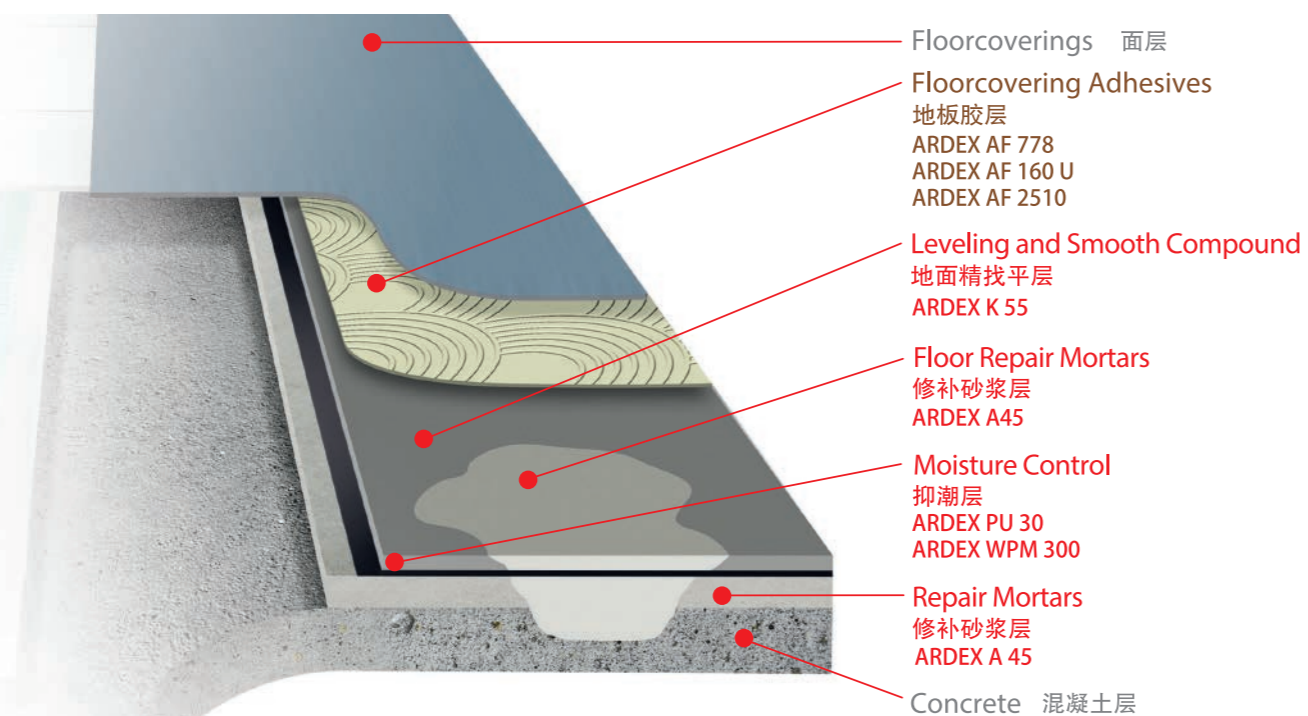


### Introduction to Floor Preparation and Repairing prior to Floorcovering Installations 地材铺设前的基层准备介绍

The Complete ARDEX fast track flooring range offers quick drying times, allowing the reopening of areas to receive heavy foot traffic in the shortest time possible, with subsequent work commencing without delay.

In this section we will cover our range of fast track products for:

- Rapid Floor Repairs · Fast Track Smoothing · Moisture Control

亚地斯快速地坪系统能够加快干燥时间，翻新区域在最短的时间内即可接受重承载交通，后续作业不会受到任何影响。在这个部分，我们的快干产品包括：· 地面快速修补 · 快速整平 · 潮气控制

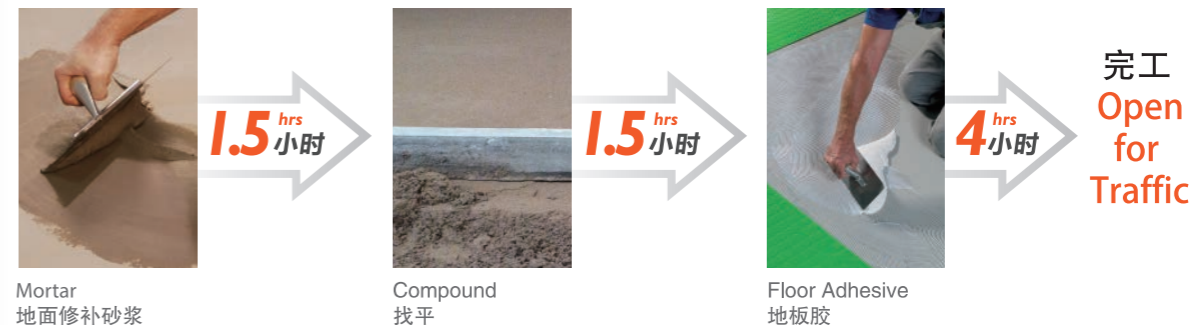

### Product Introduction 产品介绍



#### Areas of Application 应用区域

Internal floors and walls. Ideal for the rapid repair of concrete screeds and renders. ARDEX A 45 can create falls, ramps and strips.  
室内墙地面。适用于混凝土基层的快速修补。ARDEX A 45可以做坡道和防滑条。

<b>Fast Track Benefit 优势</b>	Receives finishes in as little as 90 mins regardless thickness. No priming required. 90分钟内即可完工。无需界面处理。
<b>Walkable time 开放步行时间</b>	90 minutes 90分钟
<b>Application thickness 施工厚度</b>	Feather edge to 50mm 50mm



#### Areas of Application 应用区域

Internal absorbent and non absorbent substrates. ARDEX PU30 used as a primer for moisture barrier and consolidation of smooth and dense substrates.  
室内吸收性或非吸收性基层：ARDEX PU 30是具有防潮功能的界面剂，并可对基层起增强处理。

<b>Fast Track Benefit 快干优势</b>	Drying in 1 hour as primer dry in 2 hours with sand blinding. 作为界面剂使用时，单独涂刷约1小时可干固，若表面进行抛砂处理约需2小时可干固。
<b>Walkable time 开放步行时间</b>	40-50mins 40-50分钟
<b>Coverage 用量</b>	40-45m <sup>2</sup> /bucket(2 coats) 每桶施工40-45m <sup>2</sup> (2涂)





## Product Introduction 产品介绍



**ARDEX K 55**  
Rapid Drying Levelling and Smoothing Compound



### Areas of Application 应用区域

Suitable for residential and commercial applications  
适用于住宅和商用建筑

### Fast Track Benefit 快干优势

Ultra rapid drying - ready to receive vinyl after 60 minutes  
极快干固 —— 60分钟后可后续施工塑胶地材

### Walkable time 开放步行时间

Walkable in 45-60 minutes  
45-60分钟后即可上人行走  
Ready for floor coverings in 1-2 hours  
约1-2小时即可铺贴面材

### Application thickness 施工厚度

ARDEX K 55 can be applied from 1mm to any thickness in one application.  
ARDEX K 55最薄施工厚度为1mm

### Coverage 用量

13m<sup>2</sup>/bag at 1mm



**ARDEX AF 778**  
Universal Flooring Adhesive for Carpet and Linoleum  
多用途地毯及亚麻地材地板胶

### Areas of Application 应用区域

Adhesives for bonding of PVC sheets and tiles, linoleum coverings, textile coverings.  
用于粘贴PVC卷材和块材地板, 亚麻地板、地毯等。

### Fast Track Benefit 快干优势

Walkable within a few hours.  
几小时内即可开放步行

### Application 施工

A2 notch trowel  
A2齿刮胶镬刀

### Coverage 用量

Approx. 75m<sup>2</sup>/bucket  
约 75m<sup>2</sup>桶



### ARDEX AF 160 U - General PVC adhesive 乙烯基塑料地板胶粘剂(通用型)

Water based, solvent-free. Odourless when dry. Long working time  
Wide range of applications. High strength

水性, 无溶剂成分; 干燥后无味; 操作时间长; 使用范围广; 高粘强度



### ARDEX AF 2510 - Two Component Polyurethane Adhesive 双组份聚氨酯地板胶粘剂

For floor coverings including PVC, rubber and hardwood. High heat resistance, moisture and weather resistant.  
Very high strength - for areas subject to high loads, e.g. industrial premises or sports centres.  
Solvent free and water free Suitable for under floor heating

适用于橡胶、PVC或硬木等地坪材料; 耐高温、耐湿气及耐候性佳; 高强度适用于诸如工业场所及专业运动场等高承载区域  
无溶剂, 无水份; 适用于地暖系统



### ARDEX WPM 300 - Water Based Epoxy Membrane

### 水性环氧树脂防潮膜



- Water resistant, prevents rising damp, efflorescence and with stands hydrostatic pressure
- Excellent adhesion to most substrates including damp surfaces and freshly laid green concrete
- Safe to use in sensitive locations
- 防水, 阻隔上升湿气, 防止泛碱, 能承受静水压力
- 对于大部分基层都有卓越的粘结力, 包括潮湿基层和新浇筑拌混凝土基层
- 可安全用于敏感区域

## Case Study 工程案例

### ■ H&M, Shenyang 沈阳H&M



The floor of the H&M store in Shenyang had obvious traces of dirt and was impacting the store's image to their customers. The owners hoped to renew the floor in the shortest period of time. What they required was that the floor should be clean, flat, beautiful, and easy to maintain. Although the strength and moisture content of the substrate were not ideal ARDEX still provided a professional system solution for one-day renovation by using non business hours for the construction. In the end ARDEX provided the ideal floor for the owners.

沈阳H&M旗舰店地面出现很明显的裂纹和脏污等问题, 严重影响了品牌形象。业主希望重新翻新这个旗舰店, 在尽可能短的时间内实现干净、平整的地面, 并且维护方便。


亚地斯让一切成为了可能, 在强度和湿度都非理想的情况下, 利用非营业时间, 仅仅1天便完成了地面翻新, 呈现给业主理想的地面。

### Product 产品

- Primer 界面剂
- Self-levelling 自流平: ARDEX K 55
- Floor Adhesive 地板胶: ARDEX AF 778

## Renovation solutions 翻新系统方案

### 7 hrs Car Park Floor Installation 7小时：停车场地坪系统

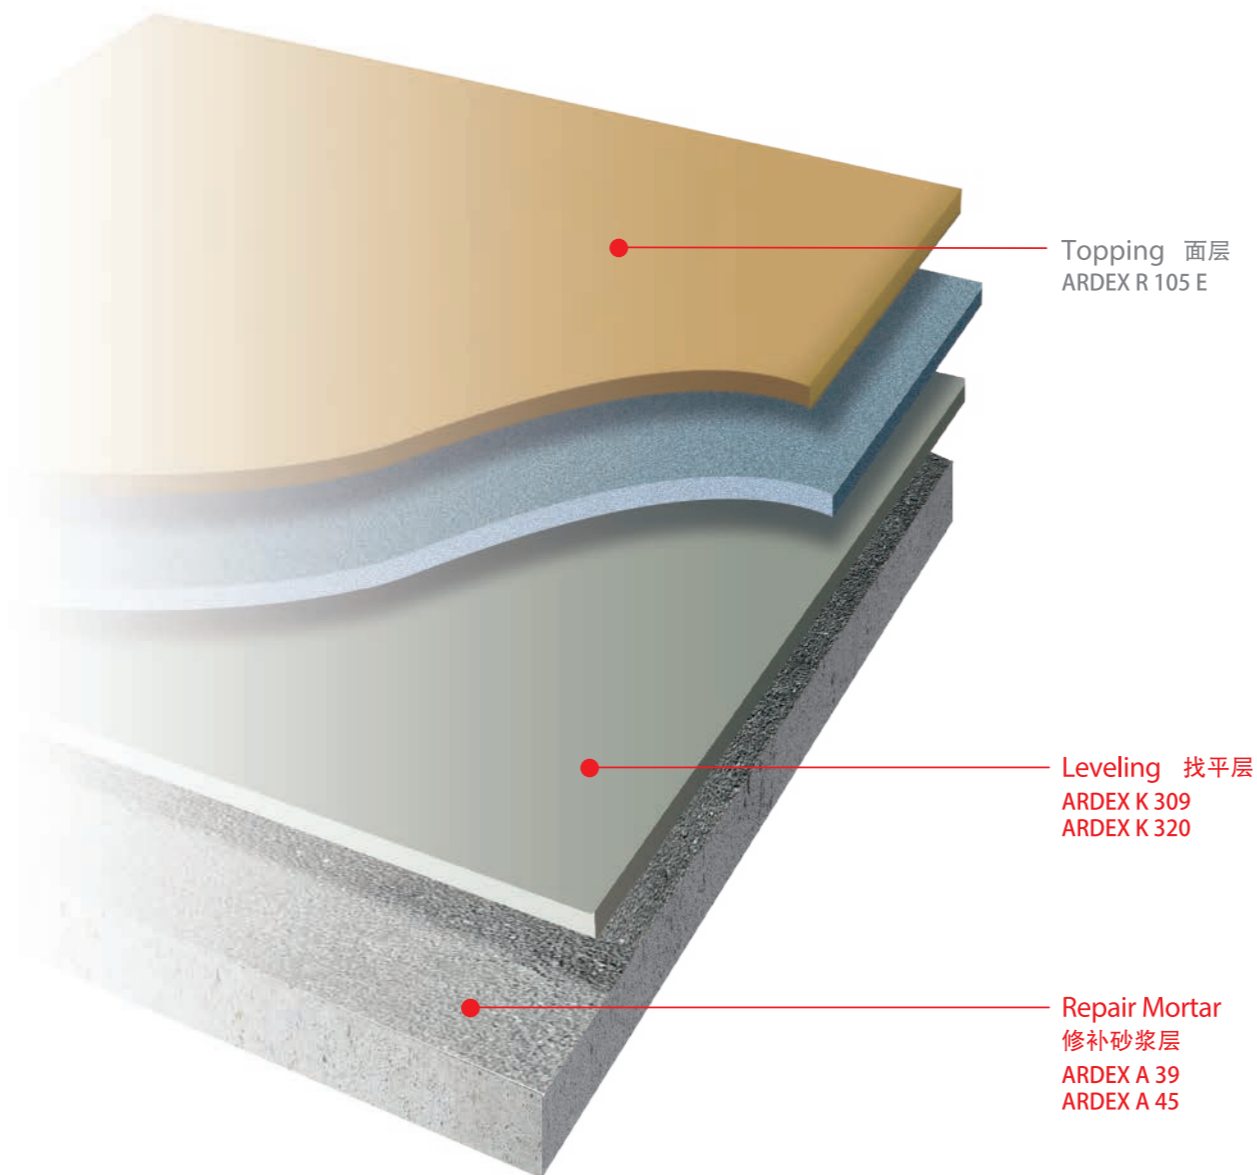

## Introduction to Car Park Floor Installation 停车场地坪系统介绍



ARDEX has a full range of car park Flooring products including cement based toppings, primer, epoxy coatings, damp proof membranes and polyurethane coatings for all sections of car park flooring applications. ARDEX range of Fast Tracking Car Park Flooring System enable rapid drying times meaning car park floors are suitable for re-opening to receive traffic in shortest downtime -7 hours.


In this section we will cover our range of fast track products for:

- Rapid Floor Repairs
- Fast Track Smoothing
- Rapid dry resin coatings

亚地斯拥有全面的停车场地坪系统产品，包括水泥基层材料，界面剂，环氧涂层，防潮层和聚氨酯涂层。亚地斯停车库地坪快速翻新系统能够加快干固时间，这意味着需要翻新的停车库地坪在短短的7小时内即可开放使用。

在这个部分，我们的快干产品包括：

- 快速地坪修补
- 快速整平
- 快干树脂涂层

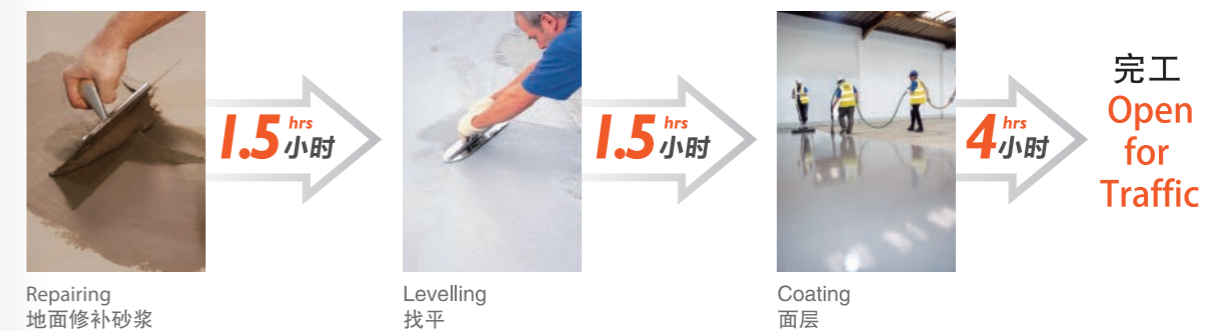



## Product Introduction 产品介绍



### Areas of Application 应用区域

Internal floors and walls. Ideal for the rapid repair of concrete screeds and renders. ARDEX A 45 can create falls, ramps and strips.  
室内墙地面。适用于混凝土基层的快速修补。  
ARDEX A 45可以做成坡道和防滑条。

### Fast Track Bene<sup>xt</sup> 快干优势

Receives finishes in as little as 90 mins regardless thickness. No priming required.  
90分钟内即可完工。  
无需界面处理。

### Walkable time 开放步行时间

90 minutes  
90分钟

### Application thickness 施工厚度

Feather edge to 50mm  
50mm



### Areas of Application 应用区域

Suitable for Internal Car Park floors. Ideal for rapid smoothing of concrete screeds in car parks and underground parking lots.  
适用于室内停车场地面。  
用于停车场和地下停车库混凝土基层的快速整平。

### Fast Track Bene<sup>xt</sup> 快干优势

Sets within 90 mins and ready to receive ARDEX R105E Fast Track Epoxy coating  
90分钟后即可施工  
ARDEX R 105 E快干环氧涂层

### Walkable time 开放步行时间

70 - 80 mins  
70-80分钟

### Application thickness 施工厚度

2mm - 20mm depth  
2-20mm厚

### Coverage 用量

3m<sup>2</sup> per bag at 5mm  
以5mm为例, 每包可施工3m<sup>2</sup>



### Areas of Application 应用区域

Suitable for Internal Car Park floors. Ideal for rapid repair of worn car park floor and parking lot surfaces.  
适用于室内停车场地面。  
用于旧停车场地坪和大量起皮表面的快速修补

### Fast Track Bene<sup>xt</sup> 快干优势

Sets with in 4 hours even on damp sub floors.  
只需4小时可固化, 可用于潮湿基层上

### Open to car traffic 开放车辆通行

Approx. 4 hours  
约4小时

### Application thickness 施工厚度

Approx. 1mm thick  
约1mm厚

### Coverage 用量

3 - 5 m<sup>2</sup>/set  
每套可涂覆3-5m<sup>2</sup>

## Hong Kong Baptist Hospital Car Park 香港浸信会医院停车场

Only 7 hours open to traffic 仅7小时开放通车



### Product 产品

- ARDEX A 45
- ARDEX K 309
- ARDEX R 105 E



### ARDEX K 320 - High Early Strength Self-leveling Topping

高早强耐磨面层自流平

ARDEX K 320 is a rapid hardening self-leveling compound, walkable after approximately 3-4 hours and ready for use after 24 hours. Colorful.

ARDEX K 320是快干型水泥基面层自流平, 约3-4小时后即可开放步行, 约24小时后即可进行后续施工。有多种颜色供选择。



### ARDEX R 50 A - Water Based Sealer

地坪浸封剂

- A new one step, super tough, water based sealer
- Being U.V. stabilized, it is suitable for areas that exposed to the elements such as entry foyers and decks
- Dust suppression
- Its non-yellowing film is tough, glossy and chemical resistant
- 耐磨型水性封闭剂
- 耐紫外线照射, 可用于室外阳光直晒区域, 如: 门厅、室内外地坪等区域
- 可减少地面起灰
- 具有耐黄变, 耐磨, 耐化学腐蚀的高光泽保护性涂膜



### ARDEX R 115 PP - Polyurethane Top Coating

溶剂型聚氨酯面漆

- Two parts, solvent based 双组份, 溶剂型
- Weather resistance 优异的耐候性
- Color stability 色彩稳定性
- UV resistance, exterior application 可用于室外, 耐UV紫外线照射
- Wear-resistance 表面耐磨
- Impact resistance 抗冲击性
- Good chemical resistance 耐化学腐蚀



### ARDEX R 120 PP - Polyurethane Body Coat

无溶剂弹性聚氨酯中涂

- Solvent free 无溶剂
- Weather resistance 耐候性佳
- Wear-resistance 表面耐磨
- Impact resistance 抗冲击
- Chemical resistance 耐化学腐蚀
- Flexible 柔韧性佳



### ARDEX R 7 PP - Polyurethane Primer

无溶剂型聚氨酯底漆

- Two parts, Solvent-free 双组份, 无溶剂
- Good flexibility, withstand micro cracks in concrete 具有良好的柔韧性, 可抵抗混凝土基材出现的细微裂纹
- Compression resistance 抗压
- Wear resistance. Impact resistance. Water resistance. Chemical resistance 耐磨表面; 抗冲击; 耐水; 耐化学腐蚀



### ARDEX R 6 E - Oil Tolerant Epoxy Primer

环氧耐油底漆

ARDEX R 6 E is a two component solvent free epoxy resin for use on oil contaminated concrete or cementitious substrates prior to installing ARDEX polyurethane screeds and self-smoothing epoxy floor coatings.

ARDEX R 6 E为一双组分无溶剂环氧耐油底漆, 用于ARDEX亚地斯聚氨酯砂浆或环氧自流平施工前遭油污污染的混凝土或水泥砂浆基层上的界面处理。





## ARDEX Fast Track Waterproofing Product 亚地斯快速防潮防水产品



- Construction Waterproof Repair  
建筑结构防水修复
- External & internal Decoration Waterproof  
室内外装饰用防水

### ARDEX WPM 308 - Wall Coating 外墙防水涂料



#### Description

ARDEX WPM 308 is a tough, UV stable, flexible, water resistant, elastomeric wall coating. It has been specifically formulated as a high quality coating for external/exposed walls. ARDEX WPM 308 is applied as an aesthetically attractive, semi-smooth to textured, low sheen, uniform finish. ARDEX WPM 308 dries quickly to produce a washable finish that hides imperfections.

#### Feature

- Flexible – accommodates normal building movement
- Provides excellent UV resistance and long term protection from weather
- Excellent Workability – easy, quick to apply
- Decorative – choice of colors
- Water based – safe to use, low odour, easy clean-up

#### 产品概述

ARDEX WPM 308是一款高强度，抗紫外线的，具有防水功能的弹性外墙防水涂料。适用于外墙表面装饰涂覆。ARDEX WPM 308具有装饰性的涂膜，可作质感纹理外观，亚光，匀质的饰面，遮盖表面瑕疵，干固迅速，耐擦洗。

#### 产品特性

- 弹性——适用常规建筑位移
- 超强抗紫外线性能，不受气候的影响
- 工作性能强——施工简单且快捷
- 装饰性——多种颜色供选择
- 水性涂料——使用安全，低气味，易清洁

### ARDEX WPM 415 - Crystalline Waterproofing Membrane 渗透结晶型防水浆料



#### Description

ARDEX WPM 415 is a one component crystalline waterproofing membrane. Its chemical composition can infiltrate into the concrete, the crystallization stops the water from permeating. ARDEX WPM 415 can be applied in wet area, effectively prevents the water pressure

#### Feature

- Easy to apply
- no odour
- Rapid set
- Prevent high water pressure
- Non-flammability

#### 产品概述

ARDEX WPM 415为单组份，渗透结晶型防水材料。所含特殊化学成份渗入混凝土，经结晶后，可于混凝土内部形成封闭阻性结晶体，有效起到防水和保护的作用。此结晶体阻断混凝土内毛细孔通道，形成永久的阻断作用。ARDEX WPM 415可在潮湿区域施工，有效抵抗正水压和负水压。

#### 产品特性

- 使用方便——环保无污染
- 无臭无毒——使用简单，只需加水拌合
- 快速凝固——一个工作日可进行两涂
- 抵抗高水压——施工面保持透气性
- 非可燃性——不含氯成份

### ARDEX WPM 401 - Waterproofing Plug 渗透结晶堵漏灵



#### Description

ARDEX WPM 401 is a quick setting waterproofing plug consisted by special cement, selective filler and unique crystalline active chemicals which penetrate and become integral part of the concrete, as the crystals react permanently in the presence of water for providing waterproofs and protections.

#### Feature

- Easy to apply – sets up under water
- Fast setting - Early harden within few minutes
- Protect concrete - Penetrating crystalline with good waterproofing

#### 产品概述

ARDEX WPM 401是一种采用特种水泥、精选骨料和特殊活性添加剂配置而成的具有渗透结晶防水功能的速凝早强凝结剂。施工简便，可在数秒或数分钟内将渗流水堵住。适用于各类水泥基结构物的渗漏止水。

#### 产品特性

- 使用方便——可在水中速凝堵漏
- 极速凝结——在数秒或数分钟内急速凝结
- 保护混凝土——堵漏、渗透结晶双重防水功效